

MDVR-X1-H0401

Mobile Digital Video Recorder


Main Features

- ◆ Supports 4 channels WD1+1 channel 720P
- ◆ Supports Hard disk for main recording
- ◆ Supports GPS for location tracking
- ◆ Supports WIFI for video files download (Optional)
- ◆ Built-in 3G/4G for live view and remote management (Optional)
- ◆ Vibration-resistant design to meet various environment needs
- ◆ Supports USB2.0 high speed backup
- ◆ Supports data recovery technology

Overview


X1-H0401 is a functional Mobile Digital Video Recorder specially designed for vehicle video surveillance and remote monitoring. It has a high-speed processor and embedded operating system, combining with the most advanced H.264 video compression / decompression technology, network, as well as GPS positioning technology. It supports not only video recording in 720P, WD1, HD1 and CIF formats, but also vehicle travel information recording and wireless data upload. It is powerful with modular design, flexible installation, easy maintenance and high reliability.

Specification

Function Overview		Preview, Recording, Playback, Network, Locating
System	OS	Linux 3.0.8
	Control Mode	Easy Check, network(3G/4G/WIFI), mouse, CP4
Video	Input	4 channels WD1+1 channel 720P
	Output	1 channel
	Total Resource	4x25fps WD1 @ PAL / 4x30fps WD1 @ NTSC +30fps 720P
	Video Signal Standard	Electrical level: 1Vpp Impedance : 75Ω NTSC/PAL Optional
Audio	Input	5channels (1 channel IPC audio input)
	Output	1channel
	Audio Signal Standard	Electrical level: 2Vpp Input impedance: 4.7kΩ
Display	Display Split	1/4
	OSD	GPS information, alarm, vehicle No., speed, date/time
	Operation Interface	Semi-transparent GUI
Recording	Video/Audio Compression	Video: H.264 Audio: ADPCM, G.711A, G.711U
	Image Resolution	Analog: PAL: WD1(928X576), WHD1(928X288), WCIF(464X288), D1(704X576), HD1(704x288), CIF(352x288); NTSC: WD1(928X480), WHD1(928X240), WCIF(464X240), D1(704x480), HD1(704x240), CIF(352x240); Digital: 720P(1280X720);
	Image Quality	1-8 levels adjustable (1 is the best)
	Recording Mode	Boot up/Manual/Schedule/Alarm
	Pre-recording	0-60minutes
	Post-recording	0-30 minutes
Playback	Playback Channel	1 channel by local playback
	Search Mode	Date/time, channel, event
Network	WIFI/3G/4G(Optional)	802.11b/g/n/EVDO/WCDMA/TDD-LTE/FDD-LTE
	IPC Ethernet	6-pin M12(10/100M x1, PON power supply)
Locating	GPS	Location tracking, speed detection and time sync
Storage	Hard Disk	2.5" SATA hard disk x 1


Interface	USB	USB2.0 x 1
	SIM	SIM slot x 1
	RS232	RS232 x 1
	Sensor	8 inputs, 2 outputs
	Speed	1 channel pulse speed detection
	Intercommunication	I mic interface
Power	Input	DC8-36V, ACC
	Output	5V@1000mA
	Max Power Consumption	32W
	Standby Power Consumption	≈0W

Dimension (mm)

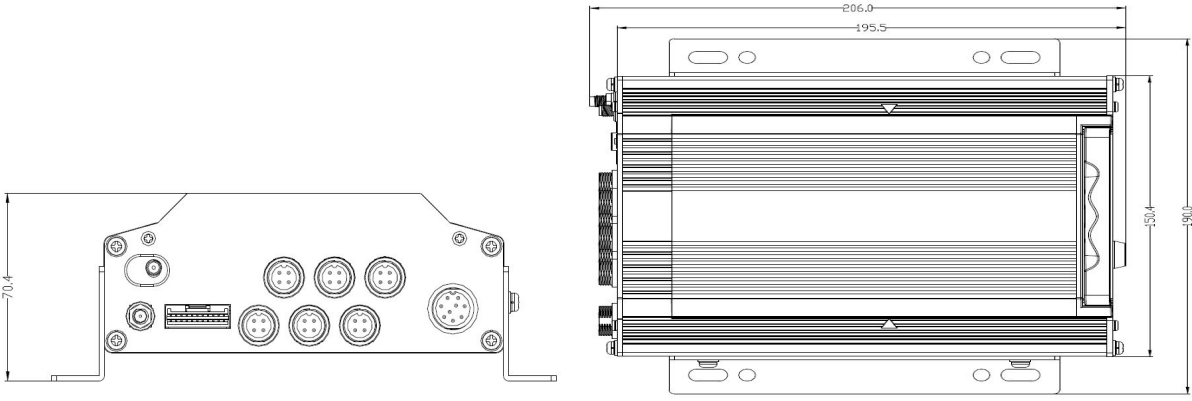





		
Physical Characteristic	Dimension (L × W × H)	206.0 x 190.0 x 70.4mm
	Weight	1.24Kg
Environment	Operating Temperature	-40°C- +70°C(With heater) or -10°C- +70°C
	Operating Relative Humidity	8%-90% (No Condense)

PC Software















Ceiba II



Standard accessories

Accessories	Description	Quantity	Accessories	Description	Quantity
	Vehicle fuses (7.5A and 15A)	2		Braces	2
	9 pin aviation power input wire	1		Screws	6
	MDVR key	1		Remote controller	1

Optional accessories

Accessories	Description	Accessories	Description
	UPS3.0		Card reader
	Inertia sensor		LED panel
	Easy Check		Multi-functional displayer CP4
	6pin aviation head transforming to RJ45		On - Board Diagnostics
	Fire proof box		Serial alarm wire
	Disk reader		Serial expansion box
	Video transforming wire		UPS-S
	Amplifier & speaker transforming wire		Serial transforming wire
	Built in 3G/4G module and Antenna		GPS module and Antenna
	Built-in WIFI module and Antenna		